


PVC FREE

LONGHORN

with Write Away™ Ink Resistant Technology




WRITE AWAY™
COLLECTION

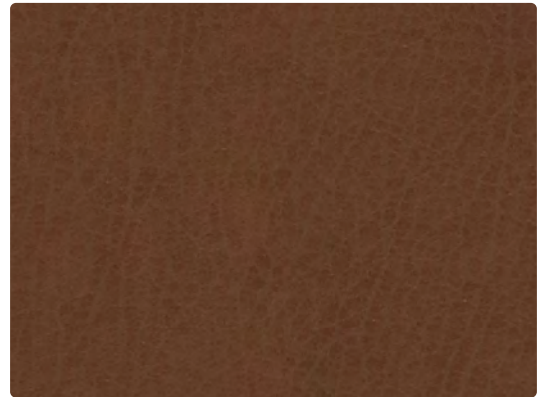


LO-020
Tawny



LO-002
Caramel

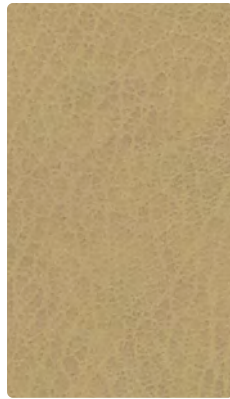

LO-007
Khaki

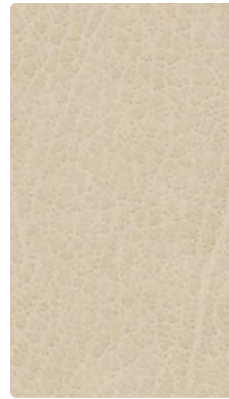

LO-027
Parchment



LO-026
Greystone



Application
Upholstery Seating, Wall, Panel


Content
62% Polyurethane Polycarbonate
- **PVC Free** face,
38% Polyester backing

Width
54 inches

Abrasion (Wyzenbeek/Cotton Duck)
Exceeds 250,000 Double Rubs

Finish
Write Away™ - Ink Resistant


Reduced Environmental Impact
GREENGUARD Certified

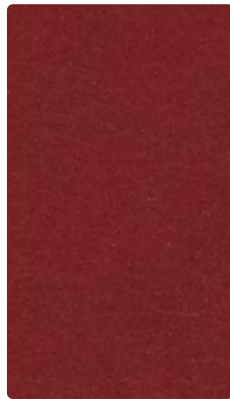

LO-001
Berry




LO-003
Oregon

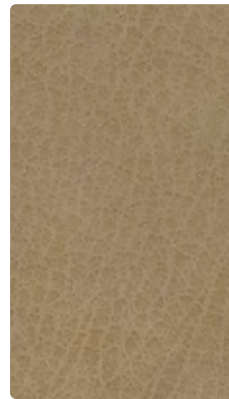


LO-017
Buff




LO-016
Shadow

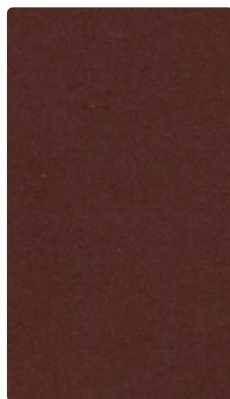

LO-009
Brandy

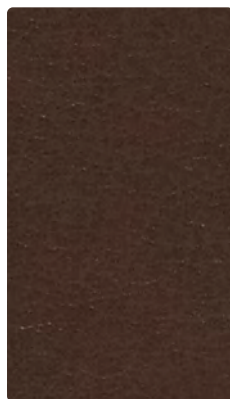

LO-010
Chestnut

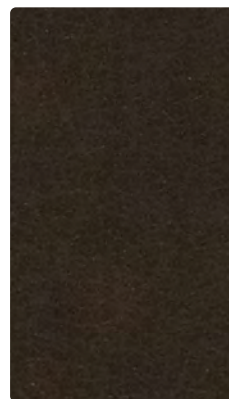

LO-000
Espresso



LO-006
Black

MAYERFABRICS

TECHNICAL INFORMATION

Content: 62% Polyurethane Polycarbonate - **PVC Free** face,
38% Polyester backing

Width: 54"

Approx. Repeat: Non-Matching

Weight: 20 oz./linear yard

Finish: Write Away™ - Soil and Stain Resistant Top Coat with Ink Resistant Technology

Directional: Yes

Railroaded: No

PERFORMANCE

Surface Abrasion: Heavy Duty ASTM D 4157
(Wyzenbeek/Cotton Duck)

Colorfastness to Crocking AATCC 8

Colorfastness to Light CFFA-2/AATCC 16-3

Hydrolysis Resistance ISO1419 (Tropical Test Method C)

Results

Exceeds 250,000 Double Rubs Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

Dry: Class 4 min / Wet: Class 4 min

Passes 200 hours

7 weeks Visual Evaluation, no cracking, peeling or delaminating

Antimicrobial: This product features an antimicrobial agent that inhibits the growth of microbes on the surface.

FLAMMABILITY

California Technical Bulletin 117-2013

NFPA 260/UFAC Class 1

ASTM E84 (Unadhered) Class 1 or A

BIFMA CS-191-53, Section 3

FMVSS 302

IMO FTP 2010 Code MSC.307(88) Part 8, 3.1

May comply with California Technical Bulletin 133 when combined with appropriate components.

REDUCED ENVIRONMENTAL IMPACT

This product is **GREENGUARD Certified for low chemical and particle emissions to UL standard UL 2818 and may contribute to LEED certification.**
For complete information visit mayerfabrics.com and UL.com/gg.

Lead Free to Comply with CAL Prop 65

Free of all Phthalates listed in CAL Prop 65

BPA Free/TRIS Free/Formaldehyde Free

Does not contain Conflict Minerals

CLEANING INFORMATION

WS: Water/Solvent Cleaner

BC: Bleach Cleanable – 1 part bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean/disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

For additional care and cleaning information, please refer to the Mayer Fabrics website.

ADDITIONAL INFORMATION

Custom Capabilities: All patterns can be custom colored. Minimum yardage applies.

Digital Swatch Card Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

Specifications: Specifications are correct at the time of printing. Current specifications are available on our website.



This fabric meets or exceeds these ACT performance guidelines.
*Certification Marks owned by ACT®



MAYERFABRICS