


APOLLO SILICONE
 MEDITERRANEAN
 SAP-024

MAYERFABRICS

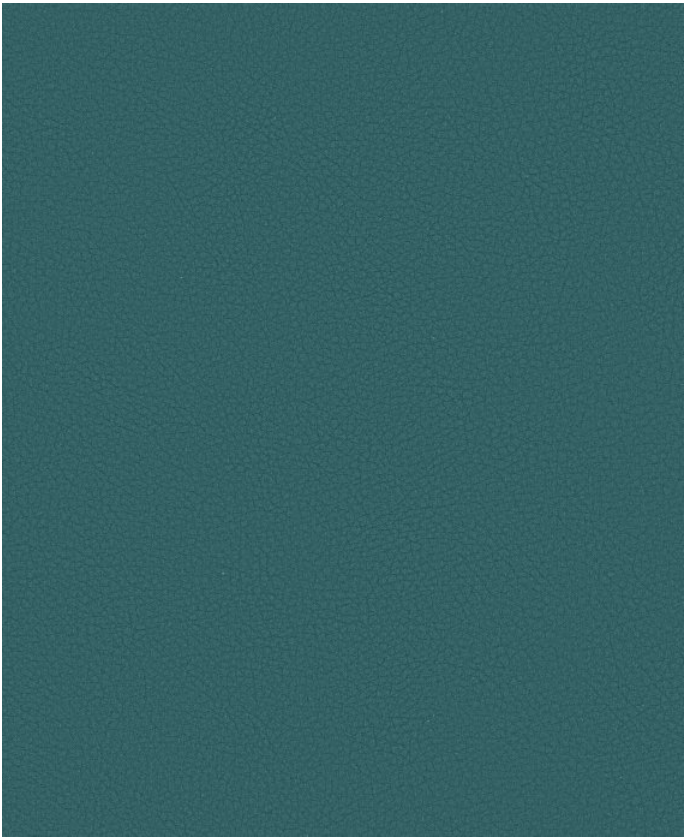

CLEANING

CFC: Coated Fabrics Cleaning - When a spill/stain occurs wipe immediately with a clean dry cloth. Carefully remove the majority of the stain then follow the steps below.
 Soap & Water - Remove ordinary dirt and smudges with a mild soap and water solution using a soft cloth or towel. Rinse with fresh water and wipe dry.
 Non-abrasive Cleaners - If residue remains, use a straight application of the following cleaners: Fantastik or 409 and gently clean with a soft cloth. Rinse with fresh water and wipe dry.
 Isopropyl Alcohol - More stubborn stains may be eliminated using a cotton cloth soaked in 70-91% isopropyl (rubbing) alcohol. Wipe without spreading stain to surrounding area. A second application should be applied with vigorous rubbing in a circular motion. For highly textured material, a soft brush is recommended to clean valleys and crevices. Rinse with fresh water and wipe dry.
 BC: Bleach Cleanable - 1 parts bleach, 4 parts water = 20% bleach, 80% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 20% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Apollo Silicone is anti-microbial & anti-bacterial without added chemicals.
 Additional cleaning details at www.mayerfabrics.com

CATEGORY
 Upholstery

PROPERTIES

CONTENT
 45% Sio™ Silicone face, 55% Polyester backing

BACKING
 Polyester

FINISH
 None

WIDTH
 54"

WEIGHT
 28 oz./ln yd

SHOWN RAILROADED
 No

DIRECTIONAL
 No

ROLL LENGTH
 30 yards

BREAKING STRENGTH
 Warp 250/Fill 250

SEAM SLIPPAGE
 Warp: 102/Fill: 102

ABRASION RESISTANCE
 Passes 225,000 Double Rubs (Wyzenbeek) Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

COLORFASTNESS TO CROCKING
 Dry: Class 4 min/Wet: Class 4 min

COLORFASTNESS TO LIGHT
 500 hours

APPLICATION
 Atrium, Indoor, Outdoor

FLAMMABILITY
 Passes Cal TB 117-2013; NFPA 260/UFAC Class 1; AB 2998 Compliant; ASTM E84 Class 2 or B (Adhered); ASTM E84 Class 2 or B (Unadhered); BS 5852: 2006 Crib 5; FMVSS 302; IMO FTP 2010 Code MSC.307(88), Part 8, 3.1 & 3.2

WARRANTY

Standard Upholstery | '5' Five Year Warranty